ID TINY DATASHEET

SUSPENDED APPLICATION

LED | 24 V | IP40

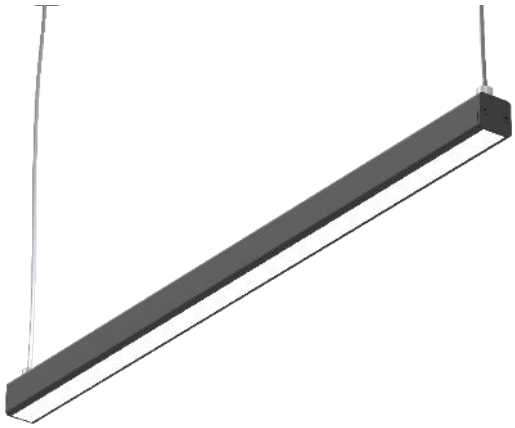

PRODUCT DESCRIPTION

LED luminaire for suspended application, with direct and indirect light.
Thermo-coated extruded aluminum profile.
Clip-on diffuser in opal polycarbonate.
Possibility of being equipped with any LED strip from our TAPE range.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>90, 50.000h of useful life.

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 3-natural/ 4-anthracite/ 8-RAL

STANDARDS: EN 60598-1, EN 60598-2-1

AVAILABLE LIGHT TEMPERATURE/ COLOR

2700K/3000K/4000K/6500K

TECHNICAL DRAWING

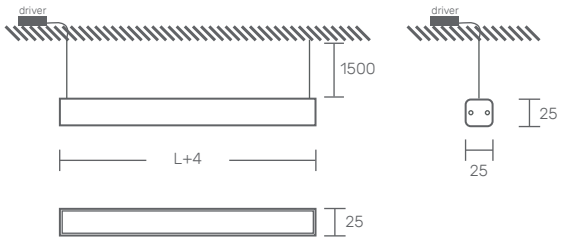

AVAILABLE DIFFUSER

0 - opaline

AVAILABLE APPLICATION

*all suspended fixtures feature either surface-mounted or recessed cablecup



Surface (standard)
Ø56x20mm
code: FL.SAL.56



Recessed
Ø56mm
code:FL.ENC.56
cutting hole: Ø50mm



Surface for driver
403x36x40mm
code:FL.LIN.403.DR

AVAILABLE DRIVER

standard: two independent circuits (direct and indirect)

1- HF - ON/OFF
2- DALI - Flow regulation

*Profile cut dimension without tops or tabs.

ID TINY

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
L 520*x25x25	2x8	2x845	IDTINY.0520.LK.AED
L 770*x25x25	2x11	2x1268	IDTINY.0770.LK.AED
L 1020*x25x25	2x15	2x1690	IDTINY.1020.LK.AED
L 1270*x25x25	2x19	2x2113	IDTINY.1270.LK.AED
L 1520*x25x25	2x23	2x2535	IDTINY.1520.LK.AED
L 1770*x25x25	2x26	2x2958	IDTINY.1770.LK.AED
L 2020*x25x25	2x30	2x3380	IDTINY.2020.LK.AED
L 2270*x25x25	2x34	2x3803	IDTINY.2270.LK.AED
L 2520*x25x25	2x38	2x4225	IDTINY.2520.LK.AED
L 2770*x25x25	2x41	2x4648	IDTINY.2770.LK.AED
L 3020*x25x25	2x45	2x5070	IDTINY.3020.LK.AED
L 3270*x25x25	2x49	2x5493	IDTINY.3270.LK.AED
L 3520*x25x25	2x53	2x5915	IDTINY.3520.LK.AED
L 3770*x25x25	2x56	2x6338	IDTINY.3770.LK.AED
L 4020*x25x25	2x60	2x6760	IDTINY.4020.LK.AED

Possibility of custom lines - On request

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/