MLEN DATASHEET

RECESSED APPLICATION

LED | 48V | IP20



STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

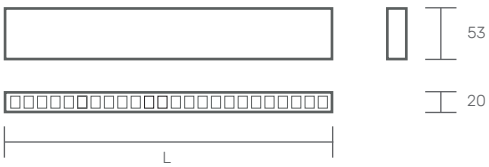

PRODUCT DESCRIPTION

LED luminaire for use on surface-mounted or recessed magnetic tracks.
Aluminum body.

LIGHT SOURCE

Driver LED, 48V.
CRI>90, 50.000h of useful life.

AVAILABLE COLOR/FINISH

2-black

TEMPERATURE/LIGHT COLOR AVAILABLE

3000K

AVAILABLE DIFFUSER

T - Transparent

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation

MLEN

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
L 112x20x53	9	859	MLEN.009.L3.2ET
L 220x20x53	17	1789	MLEN.017.L3.2ET
L 328x20x53	27	2692	MLEN.027.L3.2ET

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/