MSCUTT DATASHEET

RECESSED APPLICATION

LED | 48V | IP20



STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

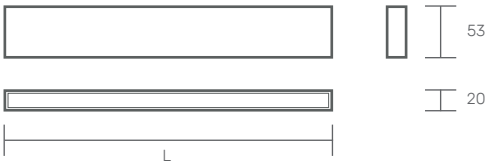

PRODUCT DESCRIPTION

LED luminaire for use on surface-mounted or recessed magnetic tracks.
Aluminum body.

LIGHT SOURCE

Driver LED, 48V.
CRI>90, 50.000h of useful life.

AVAILABLE COLOR/FINISH

2-black

TEMPERATURE/LIGHT COLOR AVAILABLE

3000K

AVAILABLE DIFFUSER

O - Opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation

MSCUTT

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
L 300x20x53	9	1343	MSC.009.L3.2EO
L 600x20x53	13	2162	MSC.013.L3.2EO
L 900x20x53	25	3496	MSC.025.L3.2EO

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/