SKY ID DATASHEET

SUSPENDED APPLICATION

LED | 230V/50Hz | IP40

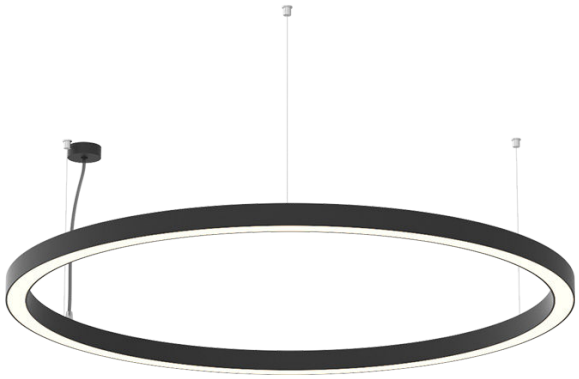

STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

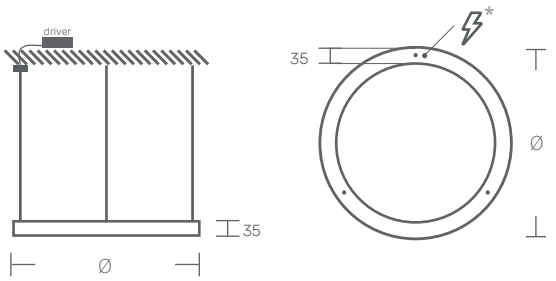

* electrical supply

PRODUCT DESCRIPTION

Circular LED luminaire for suspended application, with direct and indirect lighting.
Lacquered aluminum body.
Opal silicone diffuser.

LIGHT SOURCE

Driver LED, 220-240V / 50-60Hz.
CRI>80, 100.000h of useful life.
@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH

1- white/ 2-black/ 4-anthracite/ 6-grey/
8- RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR

2700K/ 3000K/ 4000K/ 6500K

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

standard: two independent circuits (direct and indirect)

1- HF - ON/OFF
2- DALI - Flow regulation
4- W - Bluetooth / Wifi

AVAILABLE CABLECUP



Surface
Ø56x20mm
(standard, white)
code: FL.SAL.56



Recessed
Ø56mm
Code: FL.ENC.56
Cutout: Ø50mm



Surface for driver
Ø250x30mm
code: FL.RED.250.DR
Ø350x45mm
code: FL.RED.350.DR

two power cables and four suspension cables from 1520mm diameter

SKY ID

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
Ø625x35x35	2x52	2x9100	SKYID.0620.LK.AED
Ø920x35x35	2x78	2x11700	SKYID.0920.LK.AED
Ø1220x35x35*	2x104	2x15600	SKYID.1220.LK.AED
Ø1520x35x35*	2x132	2x19800	SKYID.1520.LK.AED

*SKY ID with two drivers

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/

version 7
112026