SKY Q DATASHEET

SUSPENDED APPLICATION

LED | 230V/50Hz | IP40

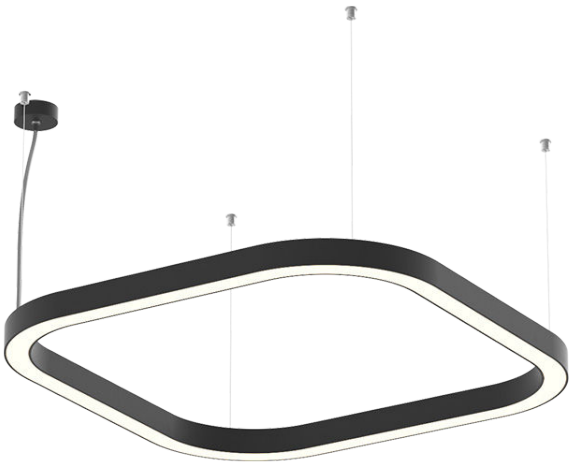

STANDARDS: EN 60598-1, EN 60598-2-1

PRODUCT DESCRIPTION

Square LED luminaire for suspended application.
Lacquered aluminum body, 35x35mm profile.
Opal silicone diffuser.

LIGHT SOURCE

Driver LED, 220-240V / 50-60Hz.
CRI>80, 80.000h of useful life.
@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH

1- white/ 2-black/ 4-anthracite/ 6-gray/
8- RAL

TEMPERATURE/LIGHT COLOR AVAILABLE

2700K/ 3000K/ 4000K/ 6500K/ TW

DIFFUSER AVAILABLE

O -opaline

TECHNICAL DRAWING

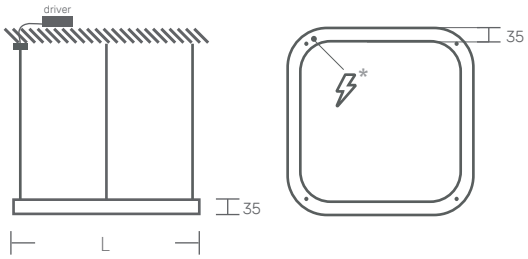

* electrical supply

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation

AVAILABLE CABLECUP



Surface
Ø56x20mm
(standard, white)
code: FL.SAL.56



Recessed
Ø56mm
Code: FL.ENC.56
Cutout: Ø50mm



Surface for driver
250x250x30mm
code: FL.Q.250.DR
350x350x45mm
code: FL.Q.350.DR

SKY Q

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
L680x680x35	64	11200	SKYQ.0680.LK.AED
L960x960x35	96	16800	SKYQ.0960.LK.AED
L1240x1240x35	128	22400	SKYQ.1240.LK.AED
L1520x1520x35	160	28000	SKYQ.1520.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/