MSLEN O DATASHEET

SURFACE APPLICATION

LED | 48V | IP20



STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

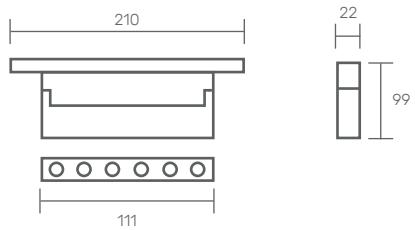

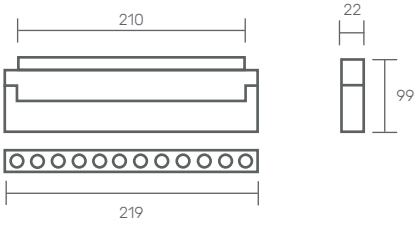

PRODUCT DESCRIPTION

LED luminaire for application on surface-mounted or recessed MAG SLIM and MAG SLIM SMALL rails.
Aluminum body.

LIGHT SOURCE

Driver LED, 48V.
CRI>90, 50.000h of useful life.

AVAILABLE COLOR/FINISH

1-white/ 2-black

TEMPERATURE/LIGHT COLOR AVAILABLE

3000K

LENS CAP AVAILABLE

N - black

AVAILABLE DRIVER

2- DALI - Flow regulation

MSLEN O

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
111x22x99	6	750	MSLENO.006.L3.A2T
219x22x99	12	1499	MSLENO.012.L3.A2T

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/