DOL Q S DATASHEET

SUSPENDED APPLICATION

LED | 230V/50Hz | IP43

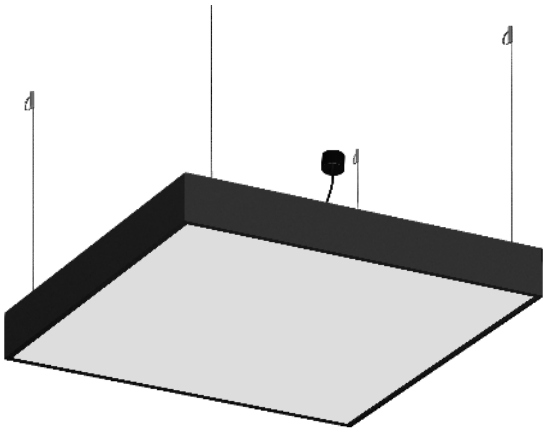

STANDARTS: EN 60598-1, EN 60598-2-1

Possibility of surface or recessed cablecup

TECHNICAL DRAWING

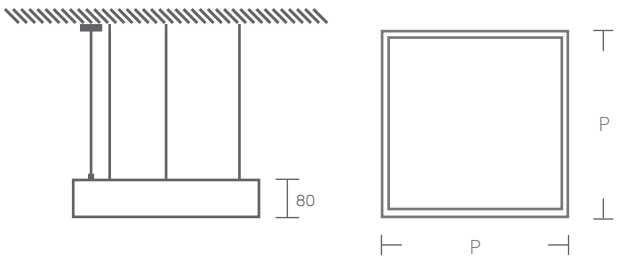

PRODUCT DESCRIPTION

Square LED luminaire for suspended application.
Extruded aluminum body coated with epoxy polyester.
Opal polycarbonate diffuser.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 65.000h of useful life.
@L80, B10, Ta 25°C

AVAILABLE COLOR/FINISH



1-white/ 2-black/ 4-anthracite/ 6-grey/ 8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER



O -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
4- W - Bluetooth / Wifi

DOL Q S

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
220x220x80	16	2800	DOL22QS.015.LK.AED
320x320x80	8	1450	DOL32QS.008.LK.AED
320x320x80	18	2900	DOL32QS.018.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/