DONUT SU

DATASHEET

SURFACE APPLICATION

LED | 230V/50Hz | IP40



STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

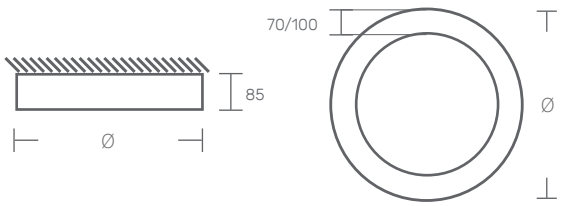

PRODUCT DESCRIPTION

Circular LED luminaire for surface application.
Lacquered aluminum body.
Opal silicone diffuser.

LIGHT SOURCE

Driver LED, 220-240V / 50-60Hz.
CRI>80, 80.000h of useful life.
@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH

1- white/ 2-black/ 4-anthracite/ 6-grey/
8- RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR

TW

2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER

O -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation
3- 1-10V - Flow regulation

DONUT SU

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
Ø620x70x85	46	8050	DSU70.0620.LK.AED
Ø930x70x85	76	13300	DSU70.0930.LK.AED
Ø1200x70x85	100	17500	DSU70.1200.LK.AED
Ø1520x70x85	128	22400	DSU70.1520.LK.AED
Ø620x100x85	46	8050	DSU100.0620.LK.AED
Ø930x100x85	76	13300	DSU100.0930.LK.AED
Ø1200x100x85	100	17500	DSU100.1200.LK.AED
Ø1520x100x85	128	22400	DSU100.1520.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/