MAG SLIM DATASHEET

MODULAR APPLICATION

48V | IP20



STANDARDS: EN 60598-1, EN 60598-2-1

30xL
recessed track

PRODUCT DESCRIPTION

Magnetic track for recessed, surface or suspended application.
Available in 3 sizes, 1000, 1500 and 2000 mm.
Lacquered extruded aluminum body.
Driver and power connector need to be installed in the rail to work.

AVAILABLE COLOR/FINISH

1-white/ 2-black

AVAILABLE DRIVER

2- DALI - Flow regulation

TECHNICAL DRAWING

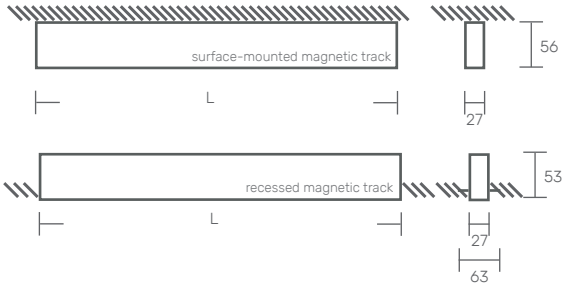

		Dimensions - mm	Code
MAG SLIM E track - curved		R400	MSE.R400.XX.A2X
		R500	MSE.R500.XX.A2X
Surface-mounted magnetic track		1000x27x56	MS.1000.XX.A2X
		1500x27x56	MS.1500.XX.A2X
		2000x27x56	MS.2000.XX.A2X
Recessed magnetic track		1000x63x53	MSE.1000.XX.A2X
		1500x63x53	MSE.1500.XX.A2X
		2000x63x53	MSE.2000.XX.A2X
Connector between surface tracks		130x16x16	MS.UNIA.XX.A2X
Connector between recessed tracks		130x16x16	MSE.UNIA.XX.A2X
Power Connector		76x16x16	MS.ALI.XX.A2X
Flexible connector between tracks		2x - 76x16x16	MS.UNIF2.XX.A2X
L Surface Union	normal	50x50x56	MS.UNIL.XX.A2X
	internal	100x100x56	MS.UNICI.XX.AXX
L Recessed Union	normal	100x100x53	MSE.UNIL.XX.A2X
	internal	100x100x53	MSE.UNICI.XX.A2X
Ceiling suspension		1500	MS.SUSP.XX.AXX
Driver	100W	300x22x48	DR.100W.MS.AXX
	200W	300x22x48	DR.200W.MS.AXX
DALI Controller		48x48x22	CTR.DALI.OSRAM

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/

MAG SLIM accessories DATASHEET

MODULAR APPLICATION

MAG SLIM E TRACK - CURVED

MSE.R400.XX.A2X | MSE.R500.XX.A2X

Magnetic track for curved recessed application.
Aluminum body.



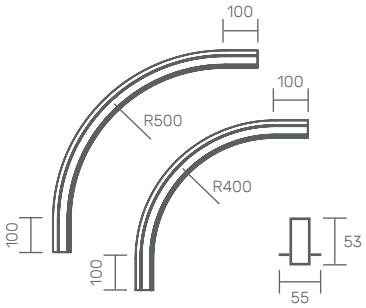

CONNECTOR BETWEEN RECESSED TRACKS

MSE.UNIA.XX.A2X

Power connector for built-in magnetic rail with joints.
Plastic and aluminum body.





CONNECTOR BETWEEN SURFACE TRACKS

MS.UNIA.XX.A2X

Power connector for protruding magnetic rail with connections.
Plastic and aluminum body.





POWER CONNECTOR

MS.ALI.XX.A2X

Power connector for recessed or surface-mounted magnetic track.
Plastic body.





FLEXIBLE CONNECTOR BETWEEN TRACKS

MS.UNIF2.XX.A2X

Flexible power connector for 2 recessed or surface-mounted magnetic rails.
Plastic body.





L SURFACE UNION - normal

MS.UNIL.XX.A2X

90° union for projecting gutter.
It needs flexible power to function.
Lacquered aluminum body.





KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/

MAG SLIM accessories DATASHEET

APLICAÇÃO MODULAR

L SURFACE UNION - interna

MS.UNICI.XX.A2X

90° union for internal light for surface-mounted track. It needs flexible power to function.
Lacquered aluminum body.





L RECESSED UNION - normal

MSE.UNIL.XX.A2X

90° union for recessed track.
It needs flexible power to function.
Lacquered aluminum body.





L RECESSES UNION - interna

MSE.UNICI.XX.A2X

90° union for internal light for recessed track. It needs flexible power to function.
Lacquered aluminum body.





CEILING SUSPENSION KIT

MS.SUSP.XX.A2X

Suspension kit for magnetic rail, which includes steel cables, electric cable, suspension accessories and finial (surface-mounted or recessed).





DRIVER

DR.100W.MS.AXX | DR.200W.MS.AXX

Drivers for MAG SLIM.





DALI CONTROLLER

CTR.DALI.OSRAM

DALI controller for push button.





KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/