MSSCUTT DATASHEET

RECESSED APPLICATION

LED | 48V | IP20



STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

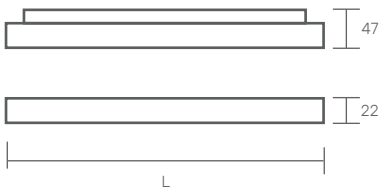

PRODUCT DESCRIPTION

LED luminaire for application on surface-mounted or recessed MAG SLIM and MAG SLIM SMALL rails.
Aluminum body.

LIGHT SOURCE

Driver LED, 48V.
CRI>90, 50.000h of useful life.

AVAILABLE COLOR/FINISH

1-white/ 2-black

TEMPERATURE/LIGHT COLOR AVAILABLE

3000K

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

2- DALI - Flow regulation

MSSCUTT

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODEZ
L 300x22x47	9	1141	MSSC.009.L3.A2O
L 450x22x47	12	1521	MSSC.012.L3.A2O
L 600x22x47	18	2282	MSSC.018.L3.A2O

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/