NOVA DATASHEET

SURFACE APPLICATION

LED | 230V/50Hz | IP54



STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

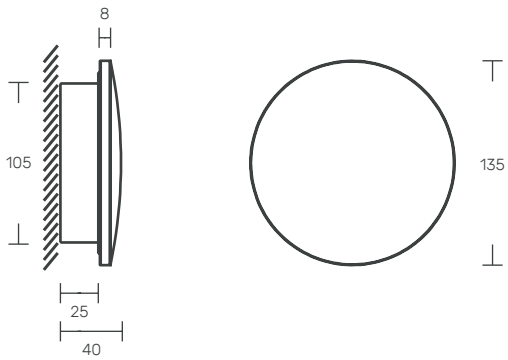

PRODUCT DESCRIPTION

LED luminaire with indirect lighting for surface-mounted wall mounting.
Lacquered aluminum body.

LIGHT SOURCE

Driver LED, 220-240VAC - 50/60Hz
CRI>80, FP>0.8, 35.000h of useful life.

AVAILABLE COLOR/FINISH

1-white

AVAILABLE LIGHT TEMPERATURE/ COLOR

3000K/ 4200K

AVAILABLE DIFFUSER

O -opaline

AVAILABLE DRIVER

1- HF - ON/OFF

NOVA

POWER (W)	FLOW (lm)	CODE
6	750	NOVA.006.LK.11O

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/