BALD DATASHEET

SURFACE APPLICATION

LED | 24V | IP20

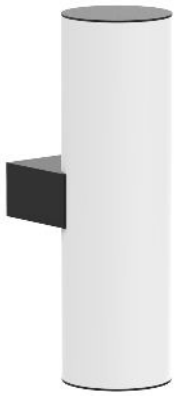

STANDARDS: EN 60598-1, EN 60598-2-1

360°

TECHNICAL DRAWING

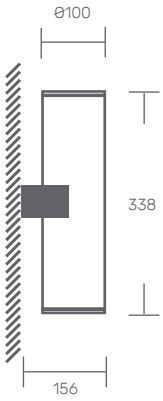

PRODUCT DESCRIPTION

LED tubular light for wall mounting.
100mm diameter opal polycarbonate body.
Lacquered aluminum tops.

LIGHT SOURCE

Driver LED, 24V.

AVAILABLE COLOR/FINISH

1- white/ 2-black/ 4-anthracite/ 6-grey/
8- RAL

AVAILABLE LIGHT TEMPERATURE/COLOR

TW

2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

1- HF - ON/OFF

BALD

POWER (W)	FLOW (lm)	CODE
14	1521	BALD.014.LK.A1O

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/