FLAM DATASHEET

SURFACE APPLICATION

LED | 24 V | IP40



STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

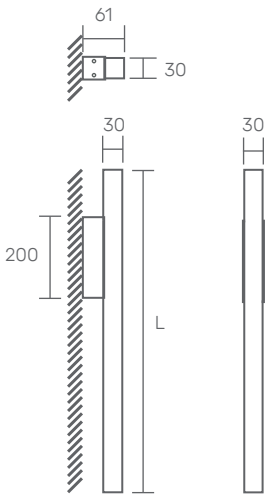

PRODUCT DESCRIPTION

LED luminaire for wall mounting with indirect lighting.
Thermoformed extruded aluminum profile.
Opal polycarbonate clip-on diffuser.
Can be fitted with any LED strip from our TAPE line.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 50.000h of useful life.

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 4-anthracite/ 6-grey/ 8-RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR

2700K/3000K/4000K/6500K

AVAILABLE DIFFUSER

O - opaline

AVAILABLE DRIVER

1- HF - ON/OFF

FLAM

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
400x30x61	4	748	FLAM.0400.LK.A1O
600x30x61	8	1495	FLAM.0600.LK.A10
800x30x61	13	2243	FLAM.0800.LK.A10

Possibility of custom lines - On request

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/