FLAT DATASHEET

SURFACE APPLICATION

LED | 230V/50Hz | IP20

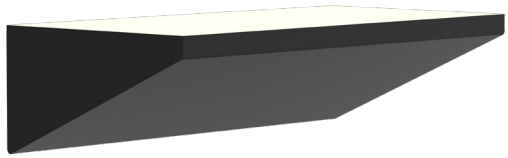

STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

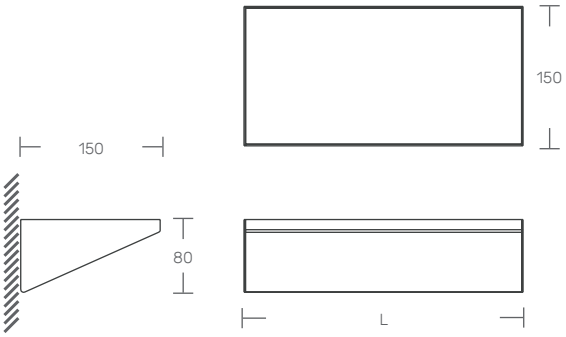

PRODUCT DESCRIPTION

LED luminaire with upper indirect lighting, for surface mounting on the wall.
Opaline diffuser.

FONTE DE LUZ

Driver LED, 220-240VAC - 50/60Hz
CRI>80, FP>0.9, 100.000h of useful life.
@L80, B10, Ta 25°C

AVAILABLE COLOR/FINISH

1- white/ 2-black/ 4-anthracite/ 6-grey/
8- RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR

TW

2700K/ 3000K/ 4000K/ 6500K/ TW

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - flow regulation

*DALI driver/equipment from 300mm

FLAT

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
160x80x150	12	2100	FLAT16.012.LK.AED
300x80x150	24	4200	FLAT30.024.LK.AED
580x80x150	48	5600	FLAT58.048.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/