# FUNI DATASHEET

SUSPENDED APPLICATION

LED | 230V/50Hz | IP20



STANDARDS: EN 60598-1, EN 60598-2-1

Possibility of surface or recessed cablecup

## TECHNICAL DRAWING

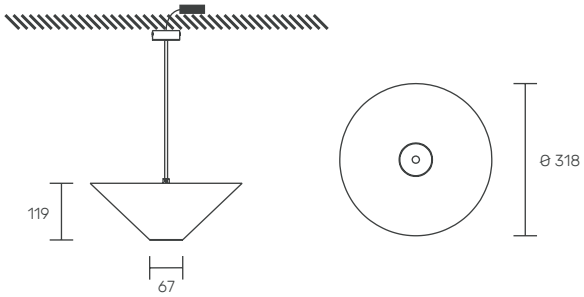


## PRODUCT DESCRIPTION

LED luminaire for suspended use, with direct and indirect light.
Extruded aluminum body coated with epoxy polyester.
Opal polycarbonate diffuser.

## LIGHT SOURCE

Driver LED, 220-240V / 50-60Hz.
CRI>80, 100.000h of useful life.
@L90, B10, Ta 25°.

## AVAILABLE COLOR/FINISH



1- white/ 2-black/ 4-anthracite/ 6-grey/
8- RAL

## AVAILABLE LIGHT TEMPERATURE/ COLOR



2700K/ 3000K/ 4000K/ 6500K

## AVAILABLE DIFFUSER



0 -opaline

## AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - Flow regulation

## AVAILABLE CABLECUP



SU - Ceiling surface (standard)
E - Recessed ceiling application

**FUNI**

| DIMENSIONS (mm) | POWER (W) | FLOW (lm) | CODE |
|---|---|---|---|
| Ø 318X119 | 2x6 | 2x900 | FUNI.006.LK.AED |

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/