MIRC DATASHEET

SURFACE APPLICATION

LED | 24V | IP44

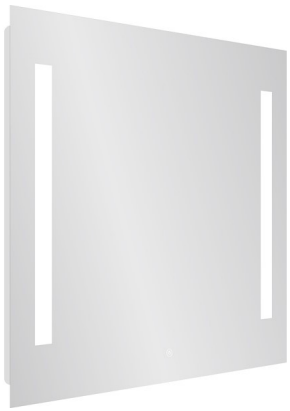

STANDARDS: EN 60598-1, EN 60598-2-1

PRODUCT DESCRIPTION

Mirror with built-in LED lighting.
5mm glass.

FONTE DE LUZ

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 50.000h of useful life.

AVAILABLE LIGHT TEMPERATURE/ COLOR

2700K/ 3000K/ 4000K / 6000K

AVAILABLE DIFFUSER

F - frosted

DRIVER DISPONÍVEL

2- DIM - flow regulation

TECHNICAL DRAWING



MIRC

POWER (W)	FLOW (lm)	CODE
24	4315	MIRC.024.LK.AEF