MYLEN DATASHEET

RECESSED APPLICATION

LED | 48V | IP20



STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

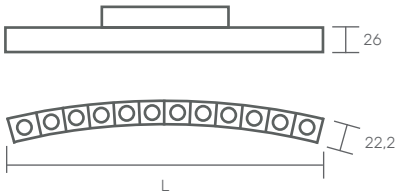

PRODUCT DESCRIPTION

LED luminaire for application on surface-mounted or recessed MAG SKY rail.
Aluminum body.

LIGHT SOURCE

Driver LED, 48V.
CRI>90, 30.000h of useful life.

AVAILABLE COLOR/FINISH

1-white/ 2-black

TEMPERATURE/LIGHT COLOR AVAILABLE

3000K

AVAILABLE DIFFUSER

T - Transparent

AVAILABLE DRIVER

2- DALI - Flow regulation

MYLEN

DIMENSIONS (mm)	DIAMETER TRACK (mm)	POWER (W)	FLOW (lm)	CODE
L 176x22,2x26	1000	6	500	MYLEN1.006.L3.AET
L 177x22,2x26	2000	6	500	MYLEN2.006.L3.AET
L 183x22,2x26	3000	6	500	MYLEN3.006.L3.AET
L 343x22,2x26	1000	12	1010	MYLEN1.012.L3.AET
L 349x22,2x26	2000	12	1010	MYLEN2.012.L3.AET
L 363x22,2x26	3000	12	1010	MYLEN3.012.L3.AET

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/