MYSCUTT DATASHEET

RECESSED APPLICATION

LED | 48V | IP20



STANDARDS: EN 60598-1, EN 60598-2-1

TECHNICAL DRAWING

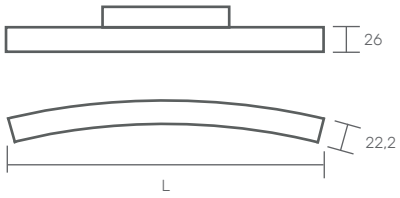

PRODUCT DESCRIPTION

LED luminaire for application on surface-mounted or recessed MAG SKY rail.
Aluminum body.

LIGHT SOURCE

Driver LED, 48V.
CRI>90, 30.000h of useful life.

AVAILABLE COLOR/FINISH

1-white/ 2-black

TEMPERATURE/LIGHT COLOR AVAILABLE

3000K

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

2- DALI - Flow regulation

MYSCUTT

DIMENSIONS (mm)	DIAMETER TRACK (mm)	POWER (W)	FLOW (lm)	CODE
L 176x22,2x26	1000	8	380	MYSCUTT1.008.L3.A2O
L 177x22,2x26	2000	8	380	MYSCUTT2.008.L3.A2O
L 183x22,2x26	3000	8	380	MYSCUTT3.008.L3.A2O
L 343x22,2x26	1000	15	710	MYSCUTT1.015.L3.A2O
L 349x22,2x26	2000	15	710	MYSCUTT2.015.L3.A2O
L 363x22,2x26	3000	15	710	MYSCUTT3.015.L3.A2O

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/