NURI DATASHEET

SURFACE APPLICATION

LED | 230V/50Hz | IP43



STANDARTS: EN 60598-1, EN 60598-2-1

180°

TECHNICAL DRAWING

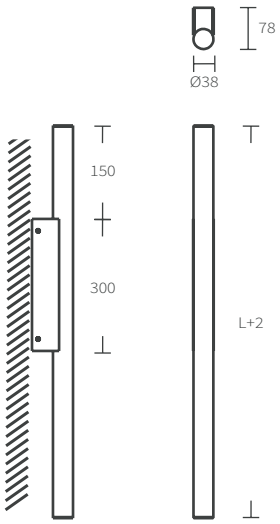

PRODUCT DESCRIPTION

LED tubular light for surface-mounted installation.
38mm diameter opal polycarbonate body.
Tops and support in lacquered aluminum.

LIGHT SOURCE

Driver LED, 220-240VAC-50/60Hz.
CRI>80, 100.000h of useful life.
@L90, B10, Ta 25°.

AVAILABLE COLOR/FINISH

1-white/ 2-black/ 4-anthracite/ 6-grey/ 8-RAL

AVAILABLE LIGHT TEMPERATURE/COLOR

2700K/ 3000K/ 4000K/ 6500K

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

1- HF - ON/OFF
2- DALI - flow regulation

NURI

DIMENSIONS (mm)	POWER (W)	FLOW (lm)	CODE
L600	16	2800	NURI.0600.LK.AED
L740	20	3500	NURI.0740.LK.AED
L880	24	4200	NURI.0880.LK.AED

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/