VALO DATASHEET

SUSPENDED APPLICATION

LED | 24V | IP43

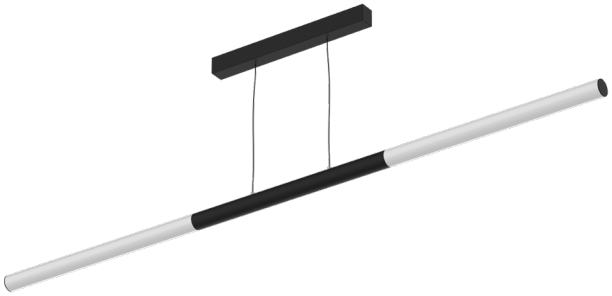

STANDARDS: EN 60598-1, EN 60598-2-1

360°

TECHNICAL DRAWING

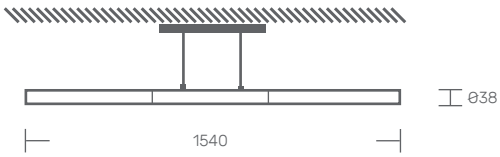

PRODUCT DESCRIPTION

LED tubular light for suspended use.
38mm diameter body in opal polycarbonate and lacquered aluminum.
Lacquered aluminum tops.

LIGHT SOURCE

Driver LED, 24V

AVAILABLE COLOR/FINISH

1- white/ 2-black/ 4-anthracite/ 6-grey/ 8- RAL

AVAILABLE LIGHT TEMPERATURE/ COLOR

2700K/ 3000K/ 4000K/ 6500K

AVAILABLE DIFFUSER

0 -opaline

AVAILABLE DRIVER

1- HF - ON/OFF

AVAILABLE CABLECUP



SU 2 - Surface with driver box (standard)
E - Recessed ceiling application
SU - Ceiling surface

VALO

POWER (W)	FLOW (lm)	CODE
60	6760	VALO.060.LK.AED

Possibility of custom lines - On request

KATOA
Everything is Lighting

Rua Dr. Manuel Ramos, 285 - Pavilhão E
4415-456 Grijó - Vila Nova de Gaia
Portugal

+351 221 110 602
ola@katoa.lighting
https://katoa.lighting/